

6211-I1 ADSL2+ Router


Quick Installation Instructions

Document Number 6211-A2-GZ10-00

November 2004

Installation

1. Connect your ADSL line to the port labeled LINE on the rear panel of the device.
2. Optionally connect your telephone to the port labeled PHONE on the rear panel of the device.
3. Connect your PC or a LAN:
 - Use the supplied Ethernet cable to connect your computer directly to the router. Connect one end of the Ethernet cable to the port labeled LAN on the rear panel of the router and connect the other end to the Ethernet port of your computer.
 - For routers with a USB port, alternatively use the supplied USB cable to connect your computer directly to the router. Connect one end of the USB cable to the port labeled USB on the rear panel of the router and connect the other end to a free USB port on your PC.
 - If your LAN has more than one computer, you can attach one end of an Ethernet cable to a hub or a switch and the other to the LAN port of the router. Either a crossover or straight-through Ethernet cable can be used; the router automatically senses the type of connection that is required.

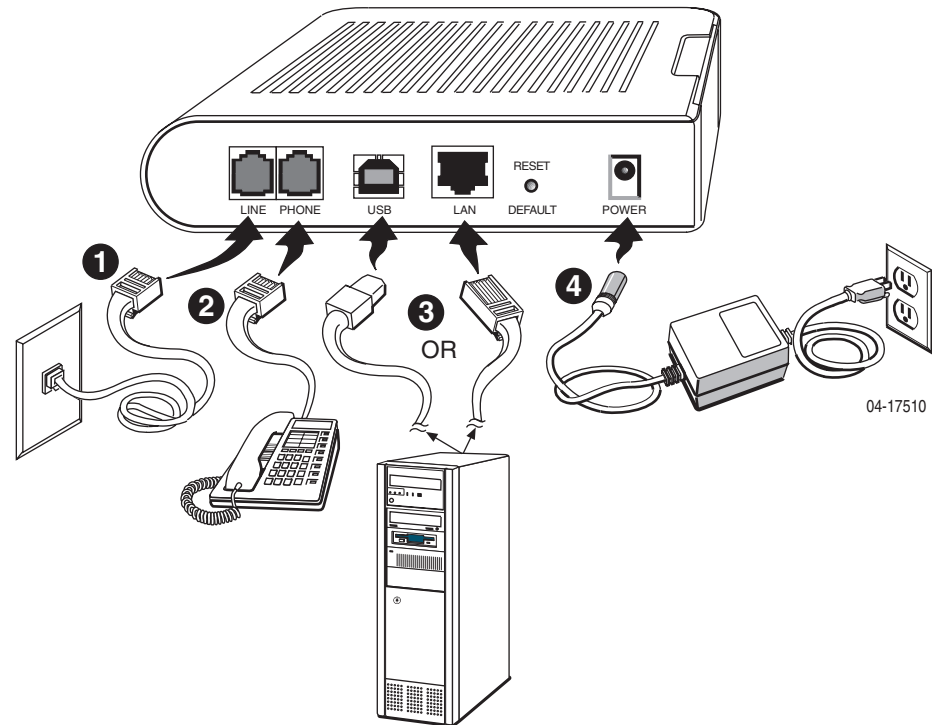

4. Connect the AC power adapter to the POWER connector on the back of the device and plug the adapter into a wall outlet or power strip.

See the user's guide on the CD for important safety instructions and more information.



6211-A2-GZ10-00