



6212 4-Port Router

Quick Installation Instructions


Document Number 6212-A2-GZ11-10

December 2004

Installation

- 1 Connect the ADSL line to the LINE jack using the provided RJ11 cable.
- 2 Optionally, connect a phone to the PHONE jack. This phone does not require a POTS splitter.
- 3 Connect PCs, hubs, and switches to the LAN ports. Either a straight-through Ethernet cable (provided) or a crossover cable can be used. The router automatically determines the type of signal required.
- 4 Attach the power adapter. The supplied power adapter may look different than the one illustrated here.

See the user's guide on the CD for more information.

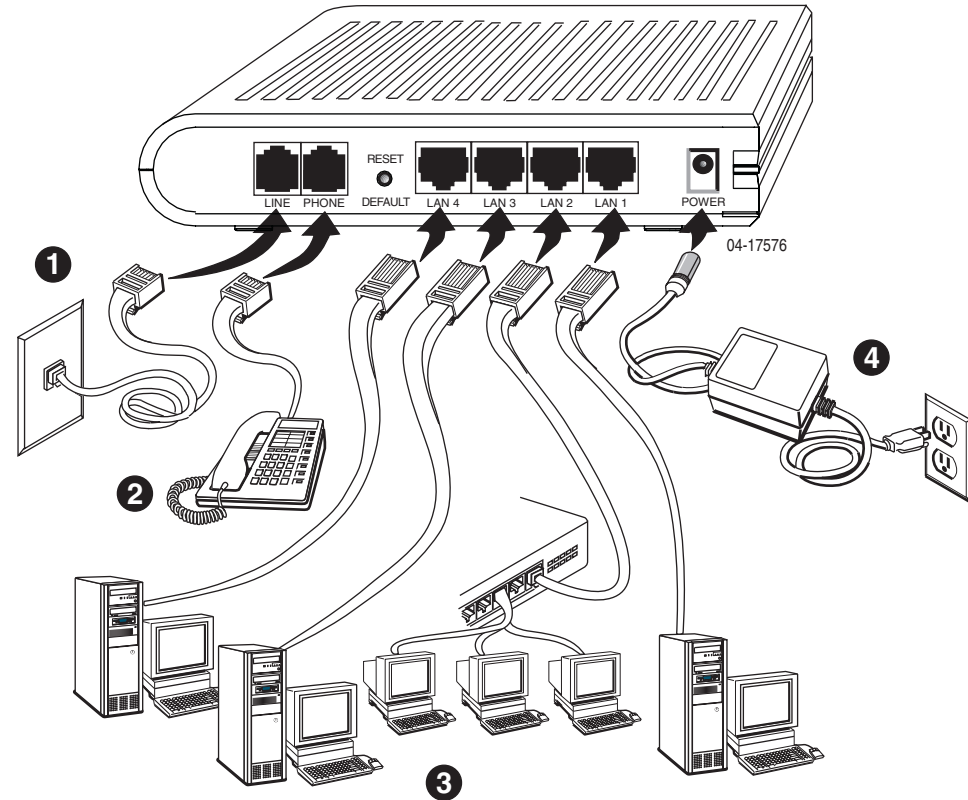

6212-A2-GZ11-10